



Triplex 3-compartment car park lift

Item No.: TW445P-H3-G

kg 2500 kg + 2000 kg **↑** 2,03 m **⚡** 400 V **⚙️** Autom.



Turn 1 into 3
There are 3 cars parked
on top of each other
in just one parking space!

Description

The TW445P-H3-G triplex 3-compartment parking lift converts a conventional parking space into 3 parking spaces one above the other. The TW445P-H3 parking system has two platforms for independent parking. The upper platform is parked first, followed by the platform below and then (if both platforms are raised) the third car is parked on the floor area. This is a single system for three suitable vehicles. Due to the design of the 4 pillars, a relatively small amount of floor space is required and at the same time only the corresponding footprint of the compact overall system is needed, ideal for tight spaces. The forward-facing control unit with a key switch ensures convenient lifting and lowering of the parking platforms. With a large underride height of 1850 mm on parking space no. 1 on the ground, the first parking space is also accessible for large SUVs. The 2nd level is suitable for vehicles with a total weight of up to 2500 kg and a height of 1650 mm, on the 3rd level vehicles up to 2000 kg are permitted, the height of the vehicle depends on its ceiling or hall height. Thanks to the unique design of the 2 platforms that interlock, the Triplex 3-storey car park lift has the lowest drive-on height of any 3-storey car park on the market, making it ideal for low vehicles such as sports cars or racing cars.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic overload valve
- A hydraulic cylinder under the driving surface ensures powerful lifting and lowering
- Mechanical safety catches
- Automatic unlocking of the safety catches
- Slack rope and rope breakage protection

Delivery contents

- Lift incl. Power unit
- Examination book and CE-Certificate
- 2 Access ramp
- Roll-off protection

Videos




Product video



Assembly video



Dimensions

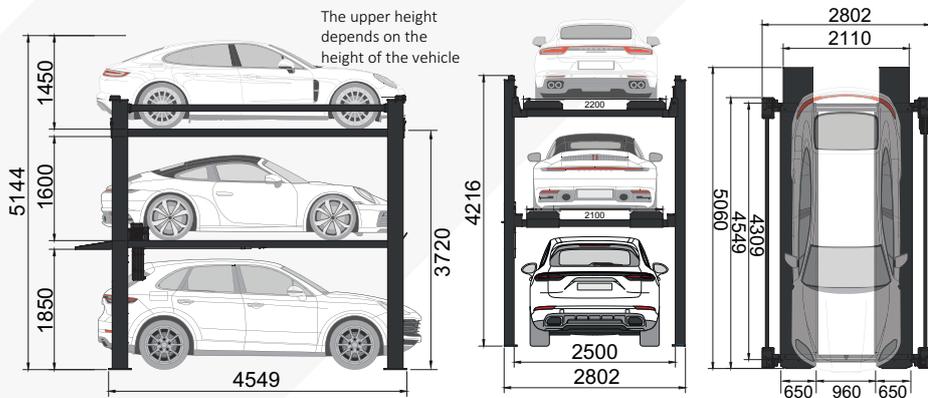

Technical Data

Lifting capacity	Pitch 1 (ground): unlimited, Pitch 2: 2500 kg, Pitch 3: 2000 kg
Lifting height max.	Until pitch 2: 2030 mm / Until pitch 3: 3720 mm
Runway length	5060 mm (incl. ramps)
Runway width	Pitch 2: 2120 mm / Pitch 3: 2220 mm
Power supply	400 V
Motor power	3,0 kW
Fusing	16 A / type C
Weight (approx.)	1700 kg

Optional accessory



Dirt protection plates (bottom)
Item No.: TW445P-H3-ADB2
1085 mm x 945 mm



Dirt protection plates (top)
Item No.: TW445P-H3-ADB3
995 mm x 945 mm

Further accessories can be found at www.twinbusch.co.uk